




Field Bus Indicator 134-I

APPLICATION

The Field Bus Indicator “134 I” is for use with the 134 - R/TL/TM/TA series of Digital Level Probes (DLP). It sends queries to and receives data from the DLP connected in the same loop. It displays Level, Interface Level, Temperature, Alarm status, Volume,% Volume and Ullage for each tank in the loop sequentially. It is housed in a Weatherproof & Flameproof enclosure.

ORDERING INFORMATION:

134	I	X	X	X	X
TYPE Field Bus Indicator					OUTPUT H: Digital HART equi.
MOUNTING TYPE S: Standard					
LEVEL ACCURACY 0: Not Applicable				TEMPERATURE 0: Not Applicable	

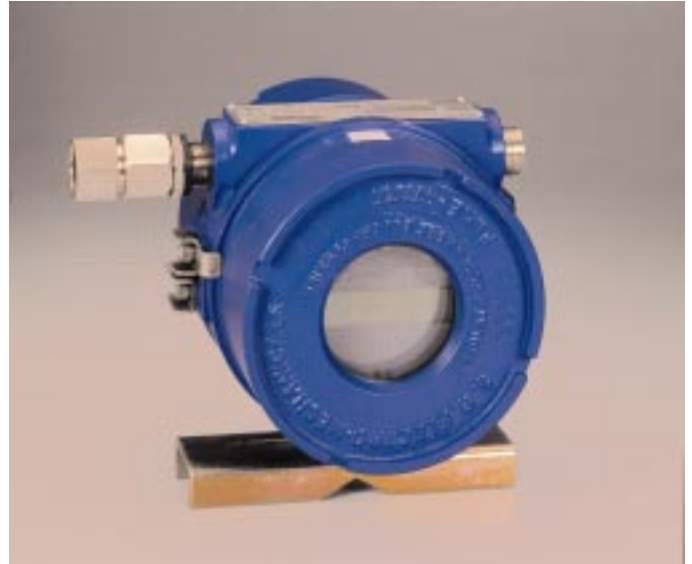

SPECIFICATIONS

Enclosure: Cast Aluminium, Weatherproof to IP-65
Flameproof – for class IIA & IIB

Display: 6 Digit 7-segment LCD, 15mm high.
Selection of parameters through four low profile keys

Mounting: Pipe Mounting

Power Supply: 24 V DC (Supplied from Petroquant or Gasquant)

Cable Gland: 1/2 “ NPT

***Continuous developments may necessitate changes without notice

LF-134-0808 R01 08/2002



SBEM Pvt. Ltd.

39, Electronic Co-Operative Estate, Pune–Satara Road, Pune – 411 009 (INDIA)

Tel. – 91-20-4220505, 4223375 Fax – 91-20-4215670

Email – sales@sbem.co.in, sbemsales@vsnl.com

Works: Bibwewadi Industrial Estate, 691/A/2, Pune-Satara Road, Pune-411 037(India) Email: mfg@sbem.co.in

Office	MUMBAI	CHENNAI	NEW DELHI	VADODARA
Tele.	91-22-5222824, 5242520	91-44-4451235, 4412947	91-11-6560647, 6969679	91-265-335196, 358184
Fax	91-22-5230236	91-44-4412947	91-11-6969679	91-265-330906
Email	mumbai@sbem.co.in	chennai@sbem.co.in	newdelhi@sbem.co.in	vadodara@sbem.co.in

